


Technical data sheet

Lightning current arrester MCF-C



Item number: 5096915

Dimensions

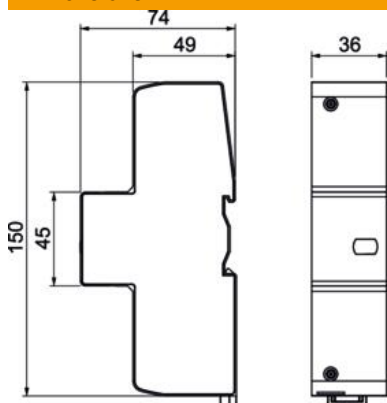

Length	150 mm
Width	36 mm
Height	74.5 mm

Technical data

Response time [L-N]	<100 ns
Blow-out	no
Pole version	1
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 µs)	25 kA
Installation location	Interior
Remote signalling	no
Follow current quenching capacity (eff) [N-PE]	50 kA
Function/defect display	Visual
Suitable for outdoor use	no
Maximum continuous voltage (L- N)	440 V
Maximum continuous voltage AC	440 V
Integrated back-up fuse	no
Short-circuit resistance for max. mains-side overcurrent protection	50 kA eff
Conductor cross-section, flexible (fine-wire), max.	25 mm ²
Conductor cross-section, flexible (fine-wire), max.	3 AWG
Conductor cross-section, flexible (fine-wire), min.	10 AWG
Conductor cross-section, flexible (fine-wire), min.	6 mm ²
Conductor cross-section, rigid (single-wire/multiwire), max.	2 AWG
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	10 AWG
Conductor cross-section, rigid (single-wire/multiwire), min.	6 mm ²
Humidity, min.	5 %

Technical data sheet

Lightning current arrester MCF-C

Item number: 5096915



Technical data

Humidity, max.	95 %
Max. mains-side overcurrent protection	315 A gL/gG
Maximum back-up fuse	315 A
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	35 kA
Nominal discharge current (8/20 µs) [L-N]	35 kA
Nominal voltage AC (50/60 Hz)	400 V
DC network form	no
IT network form	yes
Other network form	no
TN network form	yes
TN-C network form	yes
TN-C-S network form	yes
TN-S network form	yes
TT network form	yes
Ports	One-Port SPD
Test class, type 1	yes
Protection rating	IP20
Protection level	≤2,5 kV
Protection level [L-N]	≤2,5
Signalling on device	Visual
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-1	Class I+II
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C
TOV voltage [L-N] – fail safe mode – 120 min.	760 V
TOV voltage [L-N] – withstand mode – 5 s	580 V
Number of conductors (without earth)	1