


# Technical data sheet

## Cable tray, marine standard A2

Item number: 6045830



Cable tray for use in ship construction, produced according to the marine standard VG 88900-1.

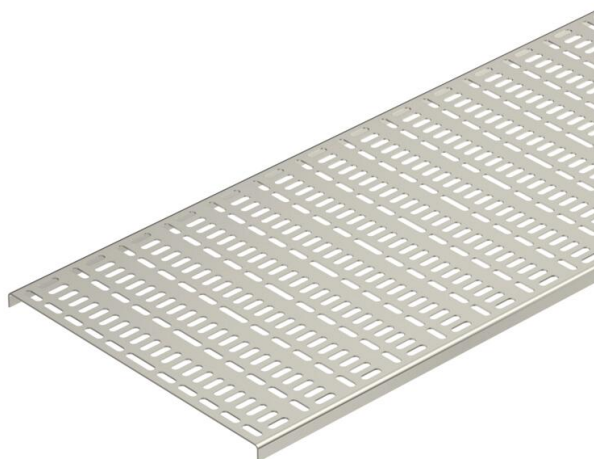

**A2** Stainless steel

**2B** Bright, treated

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 6045830                    |
| Type                               | MKR 15 050 A2              |
| Description 1                      | Cable tray marine standard |
| Description 2                      | Material thickness 1.25mm  |
| Manufacturer                       | OBO                        |
| Dimension                          | 15x50x2000                 |
| Colour                             | stainless steel            |
| Material                           | Stainless steel 1.4301     |
| Surface                            | Bright, treated            |
| Surface standard                   |                            |
| Smallest sales unit                | 2                          |
| Unit of quantity                   | Metre                      |
| Weight                             | 61.85 kg                   |
| Weight unit                        | kg/100 m                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 5,2636 kg CO2e / 1 Meter   |


# Technical data sheet

## Cable tray, marine standard A2

Item number: 6045830



### Dimensions

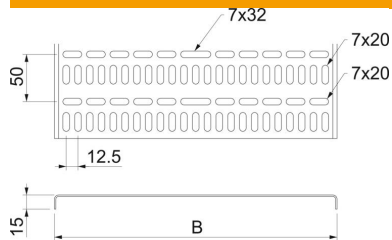

|                 |          |
|-----------------|----------|
| Dimension       | 15 X 50  |
| Length          | 2,000 mm |
| Width           | 50 mm    |
| Height          | 15 mm    |
| Plate thickness | 1.25 mm  |
| Dimension B     | 50 mm    |

### Technical data

|                                         |                    |
|-----------------------------------------|--------------------|
| Connector version                       | Without connectors |
| Walkable                                | no                 |
| Maintain electrical functions           | no                 |
| With cover                              | no                 |
| Mounting perforation in base            | yes                |
| NATO hole pattern                       | yes                |
| ROHS-conformant                         | yes                |
| Rustproof steel, pickled                | yes                |
| Side perforation                        | no                 |
| Wide-span version                       | no                 |
| Load test type according to IEC 61537   | Type II            |
| Type of connector, cable support system | Screwed            |

### Loads

|                       |           |
|-----------------------|-----------|
| Support spacing 1.0 m | 0.35 kN/m |
| Support spacing 1.5 m | 0.15 kN/m |