Support plate to accept three data connection modules of the following types: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ; 3M: CAT6 and CAT6A. Dimensions of a mounting opening in mm: 19.30 x 14.80.

A2 Stainless steel

Master data

Item number	7408718
Type	MPK 3C
Description 1	Mounting plate
Description 2	with 3x hole pattern Type C
Manufacturer	OBO
Dimension	63x36x1,5
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	1.92 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,222 kg CO2e / 1 Piece

Dimensions
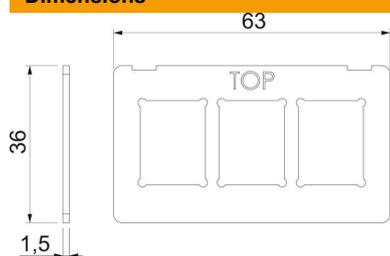
Length	63 mm
Width	36 mm
Height	1.5 mm

Technical data

Connection options	3 data connection modules of the following types: Brand-Rex: Shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ; 3M: CAT6 and CAT6A
Application	Mounting box
Number of CEE/Perilex openings	0
Number of triple openings	0
Number of installable devices	3
Number of single openings	3
Number of oval openings	0
Number of square openings	0
Number of round openings	0
Number of double openings	0
Fastening type	Lockable
Labelling panel	no
Blanking lid	no
Suitable for labelling panel	no
Device type	Miscellaneous
Installation technology	Miscellaneous