# Technical data sheet

## Internal corner, for cable trunking type LKM 80080

## Item number: 6248336

Internal corner for changing the direction of LKM trunking.
Equipotential bonding without additional aids, between base and cover



| | |
|---|---|
| St | Steel |
| FS | Strip galvanised |

### Master data


| | |
|---|---|
| Item number | 6248336 |
| Type | LKM I80080FS |
| Description 1 | Internal corner |
| Manufacturer | OBO |
| Dimension | 80x80mm |
| Colour | zinc |
| Material | Steel |
| Surface | Strip galvanised |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 38.7 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,7611 kg CO2e / 1 Piece |

# Technical data sheet

## Internal corner, for cable trunking type LKM 80080

## Item number: 6248336

### Dimensions

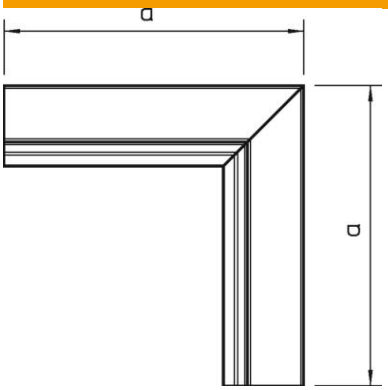


| | |
|---|---|
| Length | 160 mm |
| Width | 80 mm |
| Height | 80 mm |
| Dimension a | 160 mm |

### Technical data

| | |
|---|---|
| Version for | Base |
| Fastening type | Base perforation |
| Maintain electrical functions | no |
| Halogen-free | yes |
| ROHS-conformant | yes |
| Protection rating | IP30 |
| Protective film | no |
| Protection rating IK code | IK10 |
| Permitted temperature range, max. | 90 °C |
| Permitted temperature range, min. | -5 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |