
# Technical data sheet

## Underfloor box UGD350-3 for GESR9/55

## Item number: 7410064

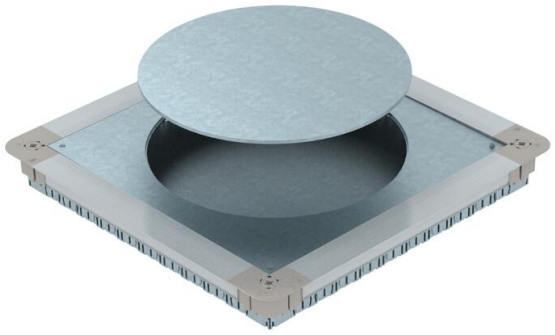

Underfloor accessory box with mounting lid and lid blanking plate with sheet steel side walls. For the installation of a round GESR9 55 service outlet in an screed height from 55 Height can be infinitely adjusted to the nominal screed height and the screed can be worked flushed to the screed scraping edge.
With pipe insertion openings each side 10x M20, 3x M25, 7x M32 Usable pipe size at a system height of 55 mm: M20.

| | |
|---|---|
| St | Steel |
| FS | Strip galvanised |

### Master data


| | |
|---|---|
| Item number | 7410064 |
| Type | UGD55 350-3R9R |
| Description 1 | Underfloor box empty |
| Description 2 | for GESR9/55UV |
| Manufacturer | OBO |
| Dimension | 467x467x55 |
| Material | Steel |
| Surface | Strip galvanised |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 775 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 41,1371 kg CO2e / 1 Piece |

# Technical data sheet

## Underfloor box UGD350-3 for GESR9/55

## Item number: 7410064

### Dimensions

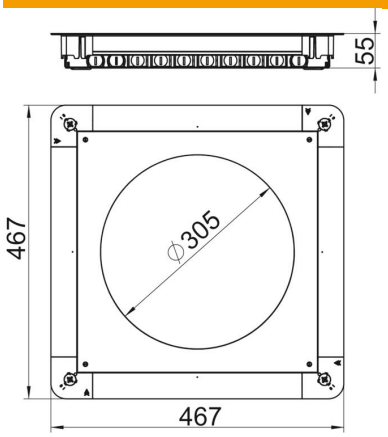


| | |
|---|---|
| Length | 467 mm |
| Width | 467 mm |
| Height | 55 mm |
| Dimension A | 467 mm |
| Dimension B | 467 mm |
| Dimension d Ø | 305 mm |
| Dimension h | 55 mm |

### Technical data

| | |
|---|---|
| Expansion option | For installation of accessories |
| Floor plate | yes |
| Lowerable to be flush-floor | yes |
| Floor care | Dry |
| Cover version | Round |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Installation opening for flush-mount unit | Round |
| Decouplable | no |
| Screed height, max. | 80 mm |
| Screed height, min. | 55 mm |
| For pipe connection | yes |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | no |
| Suitable for underfloor ducts | no |
| Trunking width, max. | 350 mm |
| Trunking width, min. | 190 mm |
| Nominal size | 350 mm |
| Nominal size for device installation units | R9 |
| Height-adjustment range, max. | 80 mm |
| Height-adjustment range, min. | 55 mm |
| ROHS-conformant | Exempt |